



Audio-video-inputs AV1-IN – AV4-IN (Cinch)

Cable colour	Assignment
● Yellow	Video signal
● Red	Audio signal right
● White	Audio signal left

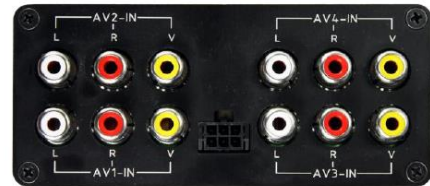

Audio-video-outputs AV1-OUT – AV4-OUT (Cinch)

Cable colour	Assignment
● Yellow	Video signal
● Red	Audio signal right
● White	Audio signal left

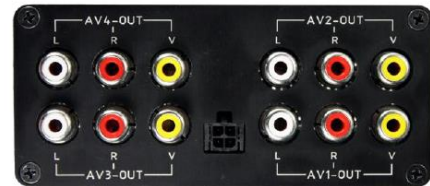

Connection for power supply

Cable colour	Assignment
● Black	Ground
● Red	+12V ACC

By keypad

The keypads are used to switch the AV-inputs. Keypad AV1 switches the AV-inputs of AV1-OUT, keypad AV2 switches the AV-inputs of AV2-OUT, etc.. Each press will switch to the next AV-input. The order is:

AV1-IN → AV2-IN → AV3-IN → AV4-IN → AV1-IN →...

The last selected AV-input is stored (Last-function-memory).

By remote control

Alternatively or additionally to the keypads an IR remote control can be used to switch the AV-inputs. The optional available IR sensor is necessary for use.

It is possible to teach each IR remote control. Press and hold keypad of the current AV-output, press the favoured button of the remote control and let the keypad loose. The selected button of the IR remote control is programmed now and it will switch the AV-inputs.